



# ALUMINIUM BI-FOLDING DOORS QUOTE REQUEST

Full Name: \_\_\_\_\_ Company: \_\_\_\_\_

Address: \_\_\_\_\_


Postcode: \_\_\_\_\_

Telephone: \_\_\_\_\_ Fax: \_\_\_\_\_

Mobile: \_\_\_\_\_ Email: \_\_\_\_\_

Installation Postcode: \_\_\_\_\_ Job Reference: \_\_\_\_\_  
If no postcode is provided, standard reinforcement will be specified.

Indicate opening sashes Width: \_\_\_\_\_ Height: \_\_\_\_\_  
including cill



Viewed from the outside

**Minimum sash width: 600mm\*. Maximum sash width: 1250mm. Max height: 2500mm**  
\*Minimum door width of 600mm only available on configurations with a traffic door, otherwise 700mm minimum sash width applies


Notes:

**Standard colours**

White gloss (RAL 9910)     Grey matt (RAL 7016)     Black matt (RAL 9005)  
 Grey matt external (RAL 7016) / White gloss internal (RAL 9910)

**Special colours RAL / BS + finish**

External RAL/BS colour:     Satin     Matt    Internal RAL/BS colour:     Satin     Matt  
 Gloss     Gloss

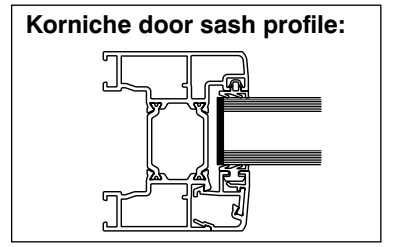

**Threshold**

Standard  
 150mm Integrated cill threshold (open out only)

**Opening**

Open in     Open out

**Notes**

Outside access unavailable without a traffic door.

We do not offer a wheelchair specific threshold option.

PAS 24 as standard

**Cill**

None     100mm  
 150mm     190mm

**Frame extender**

20mm     40mm  
 Top  
 Left     Right

**Trickle vent (s)**

1     2     3  
Frame extender not required for trickle vents  
**2500 mm<sup>2</sup> airflow per vent**

**Glazed: (28mm units)**

4mm Toughened = 1.2 U Value  
 4mm Toughened = 1.0 U Value  
 6.8mm Laminated = 1.2 U Value  
 Unglazed

**Furniture**

White     Black     Chrome  
 Grey     Brushed stainless steel

**Delivery**

Assembled  
 Kit form

**Note:**  
Please ensure that the purchasing company have sufficient able bodied representatives available at the delivery address to assist with the offloading of the products. If this is not met you may be charged for re-delivery of both product and glass